

Boom Lift

Snorkel





- Working height up to 13.5m.
- 6.1m working outreach at 5.4m clearance height
- Simple one-hand proportional controls
- Tight inside turning radius just 0.4m
- Efficient direct electric drive
- Platform rotator

AB38N AB38W

AB38N/38W boom lift specifications

	AB38N	AB38W
max. working height	13.5m	13.5m
max. platform height	11.5m	11.5m
max. working outreach	6.1m	6.1m
clearance height at max. outreach	5.4m	5.4m
platform capacity (SWL)	215kg	215kg
platform size - outside	0.6m x 1.2m	0.6m x 1.2m
width A	1.50m	1.72m
stowed height B	2.0m	2.0m
stowed length C	4.04m	4.04m
gross weight	3850kg	3160kg
gradeability	19.5° / 36%	19.5° / 36%
inside turning radius	0.4m	0.4m
outside turning radius	2.4m	2.66m
ground clearance	150mm	150mm
max. drive speed stowed	4.0km/h	4.0km/h
max. drive speed elevated	0.7km/h	0.7km/h
control system	smooth, one-hand proportional controls	
power source	8 x 6V, 220Ah batteries	

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

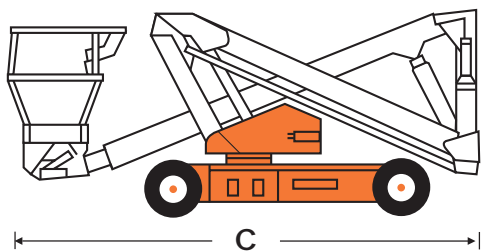


BP1: AB38N/38W AUS 11/07

standard features

- Proportional one-hand controls
- Manual platform rotator
- Minimal front boom overhang
- Ultra-tight inside turning radius
- Tilt alarm
- Large, two person platform
- Direct DC drive parallel wired wheel motors
- Non-marking tires
- Duplicate boom controls at ground level
- 1 year parts and labor warranty
- 5 year structural warranty

options

- Flashing amber beacon
- Power cable to platform
- Special paint colors
- Environmental green oil

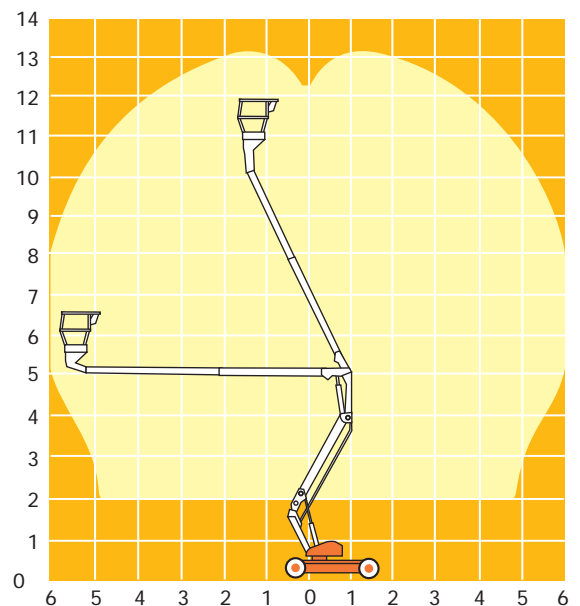

dimensions in metres

Snorkel
 Australia 2/26 Redfern Street Wetherill Park NSW 2164
 Tel: +61 2 9725 4000 Fax: +61 2 9609 3057
 New Zealand 36 Bruce Road Levin
 Tel: +64 6 3689 168 Fax: +64 6 3689 164
www.snorkel.com.au

Meets or exceeds applicable requirements of OSHA, ANSI A92.6 and CSA B354.1-04
 This product is available with the CE mark confirming compliance with all relevant European Machinery Directives



manufactured by
Snorkel
 INTERNATIONAL