

EasyScreen Gas Bottle assembly

Step 1: Remove EasyScreen from packaging.

Includes: 1 x EasyScreen with hinged side doors. 2 x top corner bracing plates. 1 x Lid. 1 x Packet fasteners and latch.

Step 2: Position the left and right sides (hinged doors attached) on a flat surface with the help of a second person. Position the top lid above the side walls making sure the lip is at back and facing down. Attach the lid using the included fasteners

Step 3: Using a level, against the rear sides, fasten the 2 corner brackets to the rear of the screen to add stability to the unit and a means of fastening the unit to the building wall.

Step 4: Position the screen around the bottles and against the building wall. Check the screen is centred correctly. You can fasten the screen to the wall through the corner brackets temporarily.

Step 5: Using a large square, position the bottom sides and mark the location with masking tape.

Important: The width of the screen at the top should be the same at the bottom! Triple check squareness of unit.


Step 6: Mark the location of the ground anchors through the holes at the bottom of walls.

Step 7: Remove the fasteners that hold the screen to the wall and remove the screen to allow you to concrete drill the ground anchor holes.

Step 8: Reposition the EasyScreen and fasten to the wall and ground.

Step 9: Install the lock latch and check the doors open without making contact with ground.



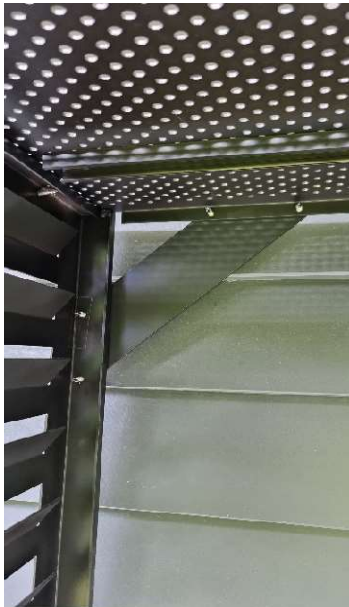



Gas Bottle EasyScreen supplied by EasyGate, 11 Hotuhotu Street, Tauriko Business Estate, Tauranga 3110. www.easygate.co.nz Ph: 07 5433497