



For further information on Standard Features & Options CALL 1300 623 622





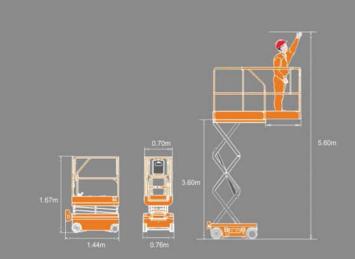

| | S036-RS |
|--------------------------------------|---------------|
| S.W.L | 240kg |
| S.W.L On Extension | 100kg |
| Max. Occupants (Indoor/Outdoor) | 2/1 |
| Working Height | 5.60m |
| Platform Floor Height | 3.60m |
| Overall Length(With Ladder) | 1.44m |
| Overall Length(Without Ladder) | 1.29m |
| Overall Width | 0.76m |
| Overall Height _(Rails Up) | 2.03m |
| Overall Height(Rails Down) | 1.67m |
| Platform Size(Length/Width) | 1.29×0.70m |
| Platform Extension Size | 0.60m |
| Ground Clearance(Stowed) | 0.06m |
| Ground Clearance(Raised) | 0.015m |
| Wheelbase | 1.05m |
| Turning Radius(Inside) | 0.40m |
| Turning Radius(Outside) | 1.55m |
| Drive Motors | 2×24VDC/0.4kW |
| Lifting Motor | 24VDC/0.8kW |
| Travel Speed(Stowed) | 4.2km/h |
| Travel Speed(Raised) | 1.1km/h |
| Up/Down Speed | 34/28sec |
| Batteries | 2×12V/85Ah |
| Integrated Charger | 24V/10A |
| Gradeability | 25% |
| Maximum Working Slope | 1.5°/3° |
| Tyres | ф230×80mm |
| Weight | 880kg |

^{*} Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only.