

## Sliding- and Fixing Clips for standing seam roofings

# REES



Original REES-Products!  
Only genuine with this sign!

### REES-Clip Product Range

Designation with rounded edges and bead to avoid the damaging of the roof-layer by high standing corners. Also to get more stability of the lower part resp. adjust the difference of nail heads.

Sliding Clips have a sliding range of 55 mm and are available in 6 different designations for seam heights from 25 to 50 mm.

If you use  $\frac{1}{4}$  Fixing- and  $\frac{3}{4}$  Sliding Clips the following sheet lengths are possible:

Titan-Zinc roofings	till 12 meters
Stainless-Steel roofings	till 16 meters
Aluminium roofings	till 11 meters
Copper roofings	till 14 meters
Zinc-coated steel roofings:	till 16 meters

If you handle longer sheets, we recommend our Long Sliding Clips with a sliding range of 70 mm.

Added to the certification on DIN EN ISO 9001, we are certified in regular terms by the german Technical Inspection Agency.

We are looking forward to advise you.


Schneefangsysteme REES GmbH & Co. KG  
Im Steinach 25a • D-87561 Oberstdorf

Phone: +49 83 22 / 94 0 67-0  
Fax: +49 83 22 / 94 0 67-99

www.rees-oberstdorf.de  
info@rees-oberstdorf.de

Delivery by authorised  
specialist shops

### REES - Fixing Clips for angle- and machine folding

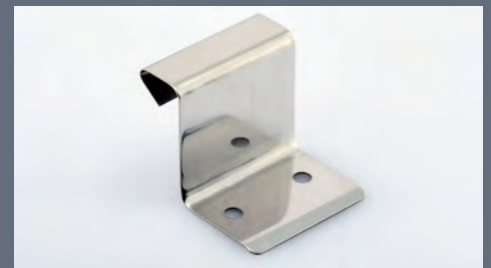

Designation with rounded edges  
and a fine splay at the foot end.

Also available with a longer foot-part  
or as a 3-hole-version for a slightly  
easier assembly.

6 different designations for seam heights  
from 25 till max. 50 mm available.